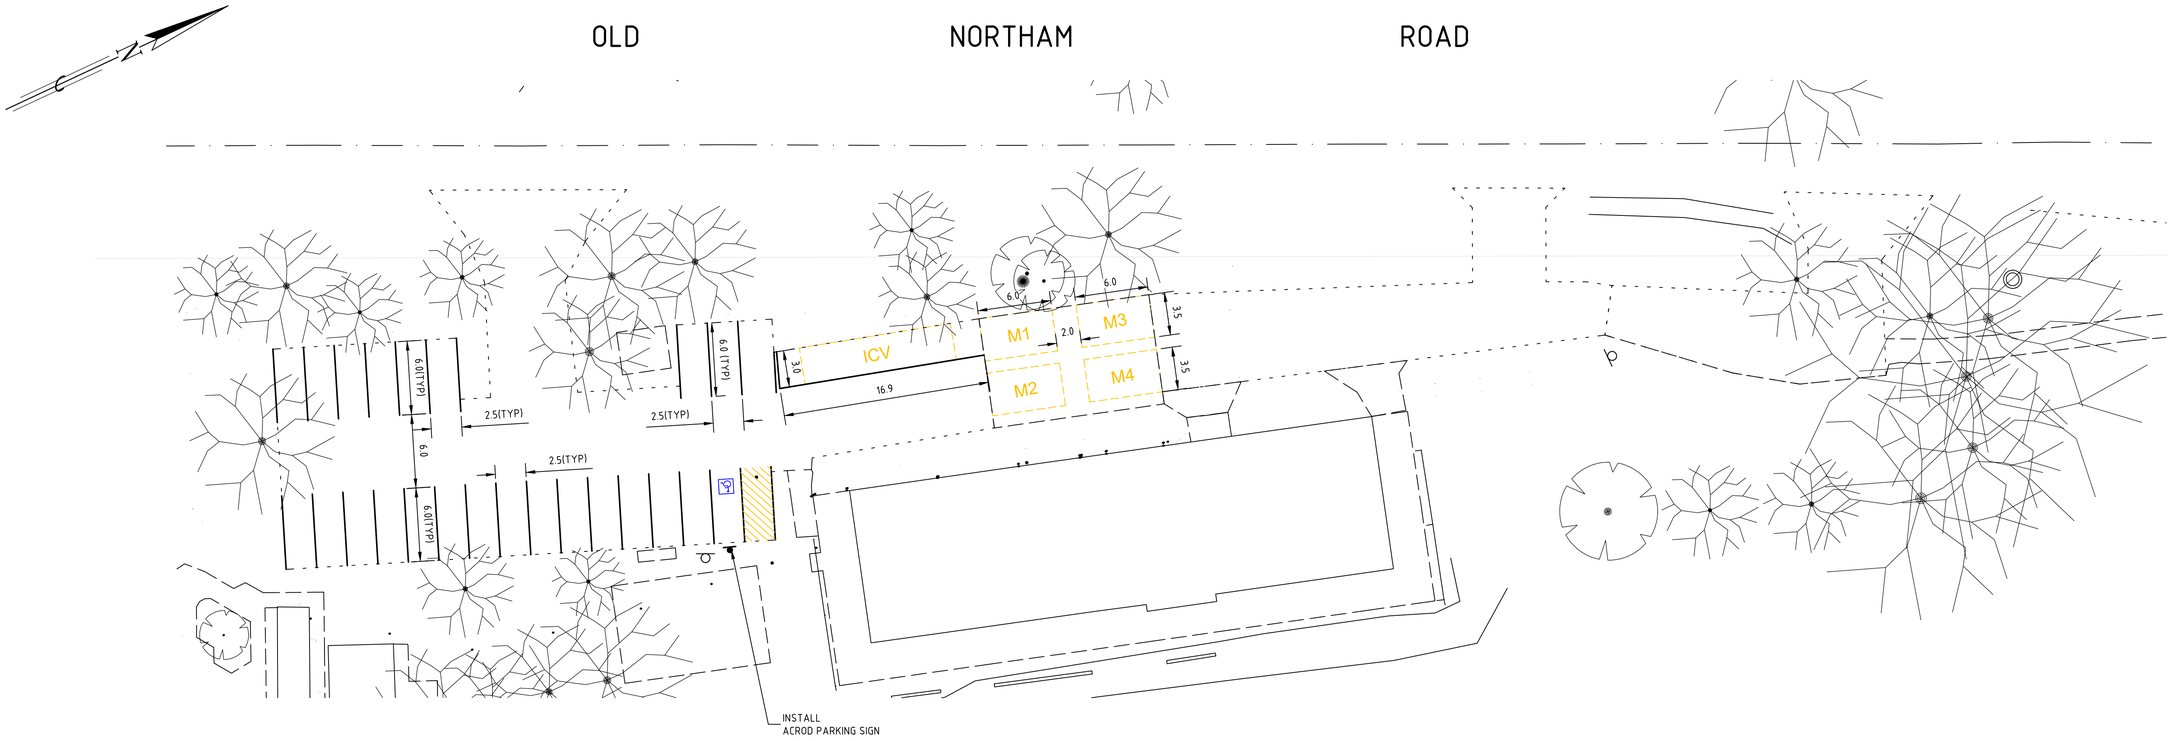

SIGNAGE AND LINE MARKING NOTES

1. INSTALL PAVEMENT MARKING AND SIGNING AS SHOWN
2. EXISTING ROAD MARKINGS REMOVED BY ROAD RECONSTRUCTION UON
3. PAVEMENT MARKINGS ARE TO BE CARRIED OUT BY THE CITY OR ITS PREFERRED CONTRACTOR

LINE MARKING LEGEND

- PROPOSED PAVEMENT MARKING - WHITE
- EXISTING PAVEMENT MARKING
- YELLOW PAVEMENT MARKING
  YELLOW "SHARED SPACE / KEEP CLEAR / PARKS/ WALK WAY " HATCHING LINE 150mm WIDE DIAGONAL LINES WITH 450mm SPACING
- PAINTED BLUE DISABLED BAY SYMBOL

BEFORE YOU DIG www.byda.com.au
Zero Damage - Zero Harm

ISSUED FOR CONSTRUCTION

LEGEND - STORMWATER

DRAINAGE	EXISTING	PROPOSED
CONCRETE MANHOLE		
TRAFFICABLE MANHOLE		
GULLY , SEP , SEG		
STORMWATER DRAINAGE LINE	D	

LEGEND - SURVEY

10.92 — LEVELS / SETOUT

1 / 11.03 — STATION, SSM / TBM

LEGEND - SERVICES

PUBLIC UTILITIES

WATER	VALVE, HYDRANT	W
GAS	VALVE	G
TELECOM	MANHOLE, PITS, PILLAR	T
SEWER	MANHOLE	S
U/GPOWER POLES , LIGHT , STAY		E
OVERHEAD POWER		OH
OPTICAL FIBRE		OF

LEGEND - CONSTRUCTION WORKS

	EXISTING	PROPOSED
ROAD CENTRELINE		
KERB BARRIER (BK)		
KERB SEMI-MOUNTABLE (SMK)		
KERB MOUNTABLE (MK)		
KERB FLUSH BEAM (FB)		
EDGE OF SEAL		
SHOULDER		
FOOTPATH / CROSSOVER		

Shire of MUNDARING

REVISION

T.K.	0	13.07.2026	ISSUED FOR CONSTRUCTION
DRAWN	No	DATE	DETAILS

SURVEY	VERIS APRIL 2026
WORK ORDER	-
DESIGNER	T.KING
DRAWN	T.KING 22.06.26
CHECKED	
APPROVED	

INCIDENT CONTROL CENTRES

CHIDLOW RESERVE

UPGRADES

CHIDLOW

LINE MARKING PLAN

0 2.5 5 6.25 7.5 10m

1 : 250

DRAWING No. 26-38

SHEET NUMBER SHEET 3 OF 3

REVISION 0

DATUM HORIZONTAL - MGA 94 VERTICAL - AHD

ORIG DWG SIZE A1